





# WINDLOAD CHARTS

## Windload Chart for #2125/2106

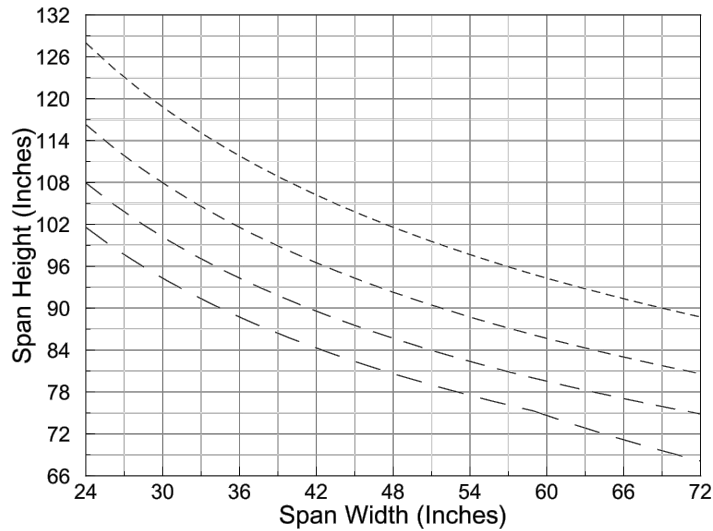

- 15 PSF
- 20 PSF
- 25 PSF
- 30 PSF

## Windload Chart for #2108/2138/2108

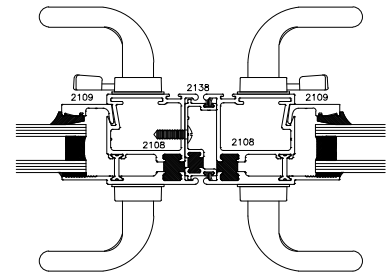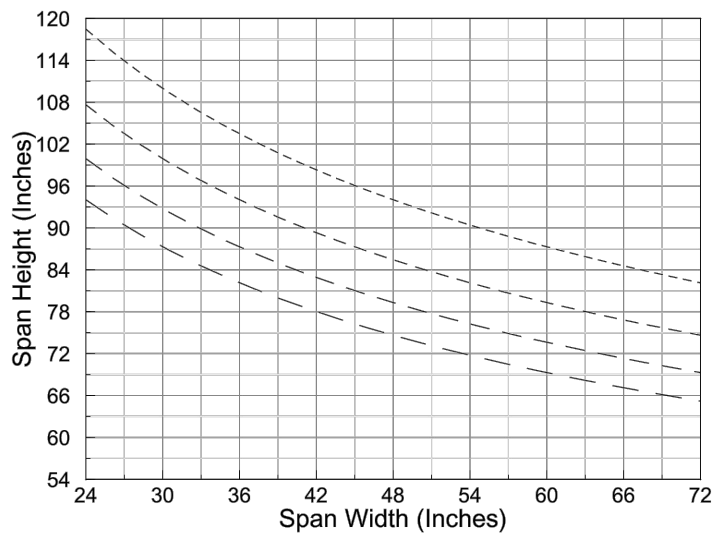


- 15 PSF
- 20 PSF
- 25 PSF
- 30 PSF

Windload charts are based on maximum deflection of L/175 for spans less than 13'-6". All curves are for mullions with horizontals. All engineering calculations for stress have been done using allowable stress of 15,000 psi for aluminum. The charted curves represent the limiting factor only. These charts do not represent Load Resistance Factor Design (LRFD). To convert to LRFD loads, reference ASCE/SEI 7 for conversion factors.

# WINDLOAD CHARTS

## Windload Chart for #2108/2133/2114

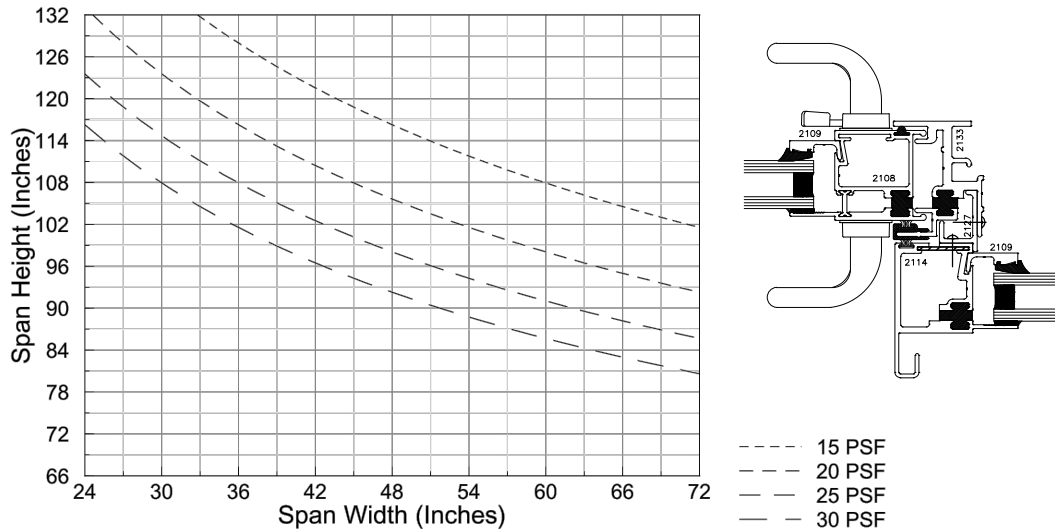

Windload chart is based on maximum deflection of L/175 for spans less than 13'-6". All curves are for mullions with horizontals. All engineering calculations for stress have been done using allowable stress of 15,000 psi for aluminum. The charted curves represent the limiting factor only. These charts do not represent Load Resistance Factor Design (LRFD). To convert to LRFD loads, reference ASCE/SEI 7 for conversion factors.