



# MANKO

## WINDOW SYSTEMS INC.


[www.mankowindows.com](http://www.mankowindows.com)

# 100—135—150

Manko's wide variety of aluminum entrance door options include the standard series. These 1 3/4" thick, 1/8" wall doors are available in three stile widths; 2" narrow stile (100 series), 3 1/2" medium stile (135 series), and 5" wide stile (150 series). Each door is available with a bottom rail height of 2 1/2", 3 1/2", 5", 7 1/2", 10", or 12". All Manko storefront doors are fabricated utilizing a telescoping mortise and tenon joint coupled with a horizontal shear block. The joints are then further reinforced with a 3/8" steel tie rod and sleeve ensuring long lasting durability and structural integrity. Each set of Manko pair doors come standard with double adjustable astragals and poly-pile weathering. These storefront doors seamlessly integrate with all of Manko's storefront and curtain wall systems. Look no further, Manko's standard series storefront doors can be a quality addition to your next project.

## FEATURES

- ⇒ 3/16" - 1" glazing infills, vision or panel
- ⇒ 3-way corner construction for added strength
- ⇒ Mid-rail heights available — 2", 4 5/16", 5 5/16", 6 13/16", 9 5/16", 11 13/16"
- ⇒ Adjustable glass setting blocks
- ⇒ Multiple standard and custom hardware options available (doors will accommodate most hardware types)
- ⇒ Offset pivots, butt hinges, center pivots, and continuous geared hinge options
- ⇒ Full range of anodized & AAMA 2605 painted finishes

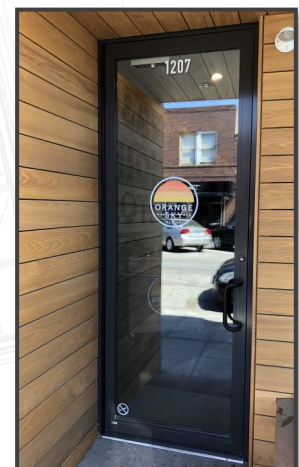

If the standard series is not the right fit for your project, please view our additional heavy wall and thermal series options